



Delivering Reliable Power Solutions for Your Mission Critical Avionics and Defense/COTS Applications

Trusted • Innovative • Reliable



READ OUR INFORMATIVE BLOGS

How to protect equipment operating from a 28Vdc vehicle source



Chip Vs. Solution



HFE Series Front End Power Supply

- 1600 W and 2500 W 1U Hot Swap
- Internal OR-ing MOSFET and Current Share
- Suitable For N+1 Redundancy
- Up to 9500 W in 1U 19" Rack
- PMBus™ (I²C) and LAN options
- Analog Output Adjustment

[HFE1600 Datasheet](#)

[HFE2500 Datasheet](#)



PFH500 Series AC-DC Power Module

- 500 W packed in 4"x 2.4" x 0.53" footprint
- PMBus™ (I²C) for Telemetry and Control
- -40 to 100°C Operating Baseplate Temperature
- Designed for Rugged and Sealed Box Environments
- Fanless, Conduction Cooling
- 400Hz Operation (See PFH500A)

[PFH500 Datasheet](#)

[PFH500A Datasheet](#)



HQA Series MIL-COTS DC-DC Converter

- 85 W and 120 W Offering
- 9 – 40 Vdc Input
- 3.3, 5, 12, 24, 28, 48 Vdc Outputs
- 2250 Vdc Isolation / 70,000 ft Operating Altitude
- -55 to 115 °C Operating Baseplate Temperature
- MIL-STD-461(F,G); 1275(D,E); 704(A-F) with FQA/FQB Filter

[HQA85 Datasheet](#)

[HQA120 Datasheet](#)




FQA/FQB Series Filter Module

- 20A / 40 Vdc Passive (FQA) or Active (FQB) Filter
- Input and Output On/Off; Reverse Polarity Protection
- Filtering for Compliance to MIL-STD-461 (F,G)
- -55 to 115 °C Operating Baseplate Temperature
- MIL-STD-1275(D,E); 704(A-F); RTCA/DO-160G Input Spike and Surge Suppression

[FQA Datasheet](#)

[FQB Datasheet](#)

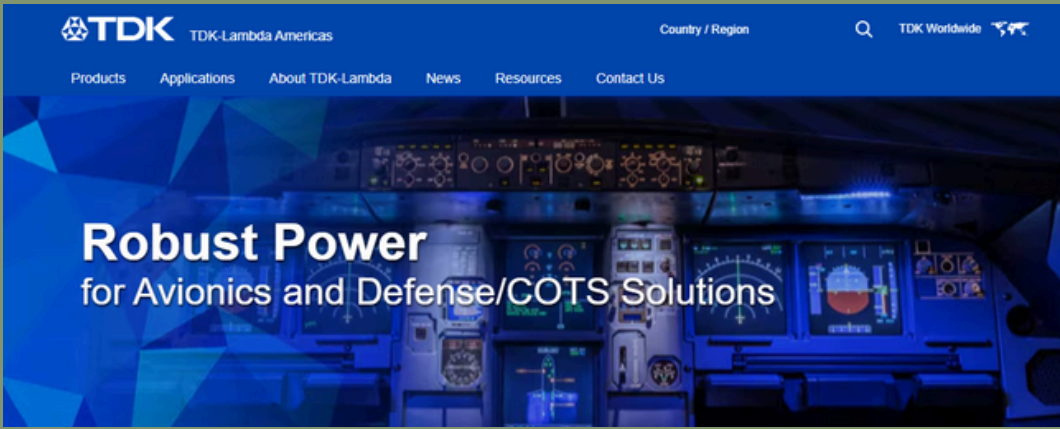

Visit our
Avionics and
Defense/COTS
Landing Page!



Latest Catalog and Brochures

Check them out!



Check out more of our technical
articles!

**TECHNICAL
ARTICLES**

<https://www.us.lambda.tdk.com/resources/blogs/>



CONTACT US



619-575-4400



tla.powersolutions@tdk.com



www.us.lambda.tdk.com



*Knowledge is power,
power is TDK-Lambda!*